




NB: AT THE TIME OF ORDER, PLEASE NOTIFY THE VOLTAGE OF THE ELECTRICAL SYSTEM (12-24 V)

THE CR TWIN LOCK D.E. QUICK COUPLER, WITH ITS **DOUBLE ACTION** SYSTEM, MANAGES THE LOCKING AND UNLOCKING OPERATIONS DIRECTLY FROM THE CAB IN A FEW SECONDS. IT MEETS THE HIGHEST RELIABILITY STANDARDS THANKS TO ITS SAFETY SYSTEMS, **SUCH AS THE VISUAL INDICATOR FOR THE LOCKING STATUS CONTROL, THE STANDARD BLOCK VALVE, THE DOUBLE-NOTCH PROFILE OF THE FORK.** THE SIDES ARE REALIZED ENTIRELY WITH THE HB400 STEEL, GRANTING GREAT RESISTANCE.

HYDRAULIC DOUBLE ACTION

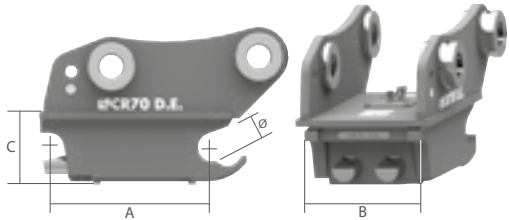

TONS (LB)		0,6 - 1,8 (1323 - 3968)		1,8 - 2,5 (3968 - 5512)		2,5 - 4,0 (5512 - 8819)		4,0 - 6,0 (8819 - 13228)		6,0 - 12,0 (13228 - 26455)	
MOD.		CR15 D.E.		CR30 D.E.		CR40 D.E.		CR50 D.E.		CR70 D.E.	
A	MM (IN)	247	(9,7)	252	(9,9)	260	(10,2)	290	(11,4)	345	(13,5)
B	MM (IN)	156	(6,1)	180	(7,1)	196	(7,7)	218	(8,6)	257	(10,1)
C	MM (IN)	101	(4,0)	107	(4,2)	109	(4,3)	133	(5,2)	148	(5,8)
Ø	MM (IN)	40	(1,6)	45	(1,8)	45	(1,8)	50	(2,0)	60	(2,4)
	KG (LB)	18	(40)	22	(49)	27	(60)	38	(84)	61	(135)
	BAR (PSI)	200	(2901)	200	(2901)	2200	(2901)	200	(2901)	200	(2901)



STANDARD TECHNICAL FEATURES

- 1 FORK'S DOUBLE PROFILE**
NEW DOUBLE CRADLE PROFILE CREATE A GREATER OBSTACLE TO THE ACCIDENTAL FALL OF THE TOOL.
- 2 FRONT SAFETY SYSTEM**
THROUGH TO THE VISUAL INDICATOR PLACED IN THE COUPLER, THE VISUALISATION OF THE LOCKING CONDITION IS SIMPLE AND IMMEDIATE.
A LOCKING PINS **B** UNLOCKIN PINS
- 3 SAFETY BLOCK VALVE**
IT ALLOWS THE QUICK COUPLER TO HOLD ITS POSITION EVEN IN THE CASE OF A PRESSURE LOSS ON THE HYDRAULIC LINE.

OPTIONAL

- 4 HYDRAULIC INSTALLATION KIT**
THIS KIT CAN BE SUPPLIED WITH THE QUICK COUPLER HYDRAULIC VERSION. SUPPLIED WITH WIRED SOLENOID VALVE AND CONTROL SWITCH.
- 5 LIFTING HOOK**
A HOOK APPROVED FOR LIFTING OPERATIONS CAN BE WELDED DIRECTLY ON THE QUICK COUPLER.
- 6 CR ADAPTE**
THE CR ADAPTER MAKES THE TOOL REVERSIBLE.