



## NB: AT THE TIME OF ORDER, PLEASE NOTIFY THE VOLTAGE OF THE ELECTRICAL SYSTEM (12-24 V)

IT IS PERFECT FOR THE MAINTENANCE AND CLEANING OF OPEN SURFACES, FLOORS, INDUSTRIAL HALLS AND STREETS THAT REQUIRE A HIGH-LEVEL CLEANING.




W/O COUPLER

MAX.

MAX. MAX.

	MOD.	EASY SWEEPY S160	EASY SWEEPY S180	EASY SWEEPY S210	EASY SWEEPY S230
Α	MM (IN)	1600 (62,99)	1800 (70,86)	<b>2100</b> (82,67)	2300 (90,55)
В	MM	1850	2050	2350	2550
	(IN)	(72,83)	(80,70)	(92,51)	(100,39)
С	MM	800	800	800	800
	(IN)	(31,4)	(31,4)	(31,4)	(31,4)
D	MM	1710	1710	1710	1710
	(//V)	(67,32)	(67,32)	(67,32)	(67,32)
	KG	610	640	675	700
	(LB)	(1344,82)	(1410,96)	(1488,12)	(1543,24)
	L	135	150	180	200
	(GAL)	(35,66)	(39,62)	(47,55)	(52,83)
	MM	600	600	600	600
	(/N)	(23,62)	(23,62)	(23,62)	(23,62)
	N.	32 + 2	37 + 2	43 + 2	48 + 2
	L/MIN	70	70	70	70
	(GAL/MIN)	(18,49)	(18,49)	(18,49)	(18,49)
	BAR	250	250	250	250
	(PSI)	(3625,94)	(3625,94)	(3625,94)	(3625,94)

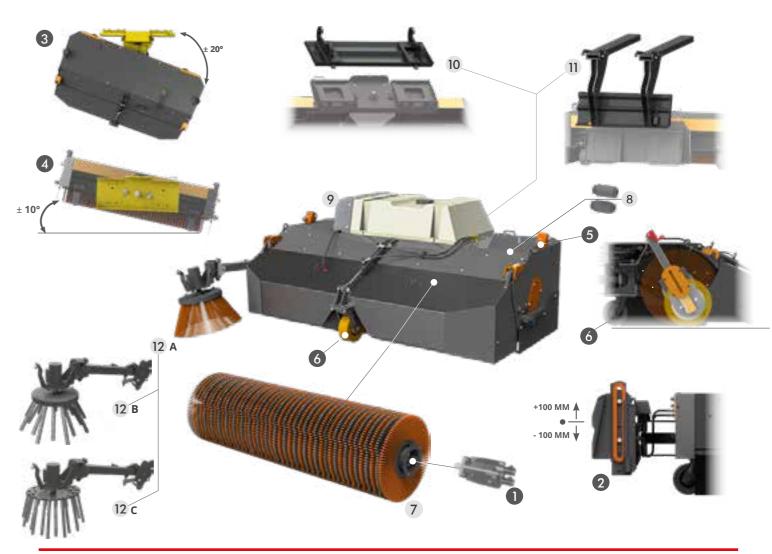

## STANDARD TECHNICAL FEATURES

- ENGINE WITH SQUARE FLANGES AND DISK GEARBOX
  - SHAFT WITH INTEGRATED ENGINE
- 2 COMPACT FLOATING SYSTEM 200 MM

IT ALLOWS THE SWEEPER TO FOLLOW THE GROUND AND BETTER THE FINAL RESULT. DESIGNED FOR MACHINES SUCH AS LOADERS AND TELESCOPIC LOADERS.

3 ANGLE SIDE HYDRAULIC TILTING ADJUSTMENT OF ± 20°

IT ALLOWS THE HYDRAULIC ADJUSTMENT OF THE TILTING ANGLE UP TO A MAX. OF +/-20° ON EACH SIDE.

4 TILT - HORIZONTAL MECHANICAL TILTING ADJUSTMENT OF ±10°

IT ALLOWS THE MECHANICAL ADJUSTMENT OF THE WORKING PLANE TILTING ANGLE UP TO A MAX. OF +/- 10° ON EACH SIDE.

- **6** ROLLER PRESSURE ADJUSTMENT SYSTEM
- 6 PIVOTING WHEELS

## **OPTIONAL**

7 PPL+STEEL BRUSH KIT

RECOMMENDED FOR THE CLEANING OF PARTICULARLY ABRASIVE SURFACES.

8 FLOWRATE REDUCERS

MANDATORY ON HIGHFLOW MACHINES OR WITH OILRATE HIGHER THAN 70 L/MIN.

9 DUST-CONTROL SYSTEM WITH TANK AND PUMP

PRESSURIZED WATER SYSTEM WITH TANK FOR THE CONTROL OF DUSTS PRODUCED DURING THE WORKING CYCLE. SPRINKLERS ARE POSITIONED INSIDE THE SWEEPER

- 10 ARTICULATED LOADERS, BACKHOE LOADERS AND TELEHANDLER HANDLERS HITCH
- 11 COUPLING FRAME FOR FORKS
- 12 PPL BRUSH (A) STEEL BRUSH + RUBBER PLATE (B) STEEL BRUSH + STEEL PLATE (C)